

CORIA 4700LM 600MM I KL IP20 ZWIESZANY BIAŁY MAT 830 (50W)

DOWNLIGHTS

LEDGO!



220-240 V | LED | IP20

TECHNICAL PARAMETERS

Light source:	LED
Ingress protection:	IP20
Nominal power [W]:	50
Luminous flux [lm]*:	4700
Colour temperature [K]:	3000
Colour rendering index:	>80
Energy efficiency class:	A+
Material of the body:	powder coated steel
Colour of the body:	white matt
Diffuser material:	PS

*Tolerance +/- 10%


CHARACTERISTICS

Round LED luminaire with a big diameter and an integrated energy-saving light source guarantees high luminous flux and even light distribution. Its body is made of white powder coated steel, and the diffuser is made of opal PMMA. It works perfectly while designing new applications as well as replacing traditional luminaires with energy-saving LED solutions. A suspended version is also available. Suspension and electrical cords are not included (available as accessories).

APPLICATION

Luminaire is dedicated for indoor use. Due to good lighting of the surface and even light distribution, it is particularly well-suited to be used as the main light source in representative rooms and passageways. The fitting's design is suitable for surface or recessed mounting in plasterboard ceilings.

LIGHT CURVES

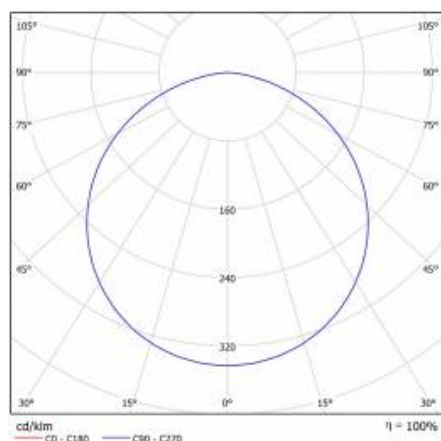

CORIA 4700LM 600MM I KL IP20 ZWIESZANY BIAŁY MAT 830 (50W)

DOWNLIGHTS

LED GO!

TECHNICAL PARAMETERS TABLE

Light source:	LED	Dimensions [mm]:	ø600/86
Nominal power [W]:	50	Ingress protection:	IP20
Rated power of the luminaire [W]:	51	Mounting version:	suspended
Supply voltage [V]:	220 - 240	Working temperature [°C]:	from -17 to +35
Frequency [Hz]:	50 - 60	Net weight of the luminaire [kg]:	6.500
Luminous flux [lm]:	4700	Index:	555107
Luminous efficacy [lm/W]:	91	EAN:	5905963555107
Energy efficiency class:	A+	Category type:	downlights
Electrical protection class:	I	CE certificate:	113/2018
Colour temperature [K]:	3000	Warranty:	2
Colour rendering index:	>80	ETIM class:	EC001743
SDCM:	≤ 3		
Power factor:	0.97		
LED lifespan L70B50 [h]:	50000		
Diffuser material:	PS		
Diffuser type:	OPAL		
Material of the body:	powder coated steel		
Colour of the body:	white matt		

*Tolerance+/- 10%

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2018-12-06



Lena Lighting S.A.
ul. Kórnicka 52
63-000 Środa Wielkopolska

tel. +48 61 28 60 300
e-mail: office@lenalighting.pl
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



113/2018