




max. **160lm/W**

LiFUD® DALI



[mm]	a	b
HBP3-100:	Ø270	115
HBP3-150:	Ø270	115
HBP3-200:	Ø305	115
HBP3-240:	Ø340	122

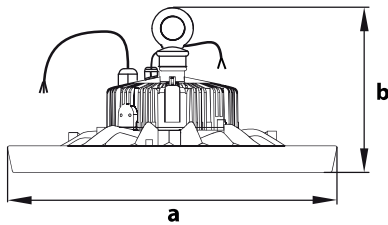

INDEX

C85-HBP3-100D-090BL
C85-HBP3-150D-090BL
C85-HBP3-200D-090BL
C85-HBP3-240D-090BL
C85-HBP3-100A-120BL
C85-HBP3-150A-120BL
C85-HBP3-200A-120BL
C85-HBP3-240A-120BL



EAN

5900280968029
5900280968036
5900280968043
5900280968050
5900280963505
5900280963512
5900280963529
5900280963536



PACKAGE

1
1
1
1
1
1
1
1



COLOUR TEMPERATURE

4000K
4000K
4000K
4000K
4000K
4000K
4000K
4000K



POWER

100
150
200
240
100
150
200
240



LUMINOUS FLUX (EFFICACY)

16 000lm (160lm/W)
24 000lm (160lm/W)
32 000lm (160lm/W)
38 400lm (155lm/W)
16 000lm (160lm/W)
24 000lm (160lm/W)
32 000lm (160lm/W)
38 400lm (155lm/W)

* Index without DALI

** Warranty depending on working hours(max.12 h/day: 5 years warranty; 24 h/day: 3 years warranty)