


## LFS LOFOT

LED FLOODLIGHT  
LED LICHTFLUTER  
ПРОЖЕКТОР LED  
PLOŠNÉ SVÍTIDLO LED





LFS-050

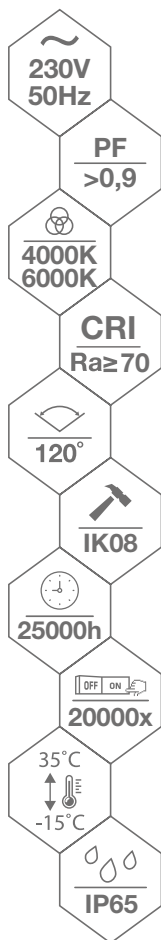

LFS-200

MATERIAŁ ► stop aluminium, szkło hartowane  
MATERIAL ► aluminum alloy, tempered glass  
MATERIAL ► aluminiumlegierung, gehärtetes glas  
МАТЕРИАЛ ► алюминиевый сплав, закаленное стекло  
MATERIAL ► hliník, tvrzené sklo

[mm]	a	b	c	d
LFS-010:	111	122	25	103
LFS-020:	161	168	28	133
LFS-030:	202	213	30	165
LFS-050:	242	255	32	195
LFS-100:	318	332	58	271
LFS-150:	361	378	59	290
LFS-200:	402	415	66	330

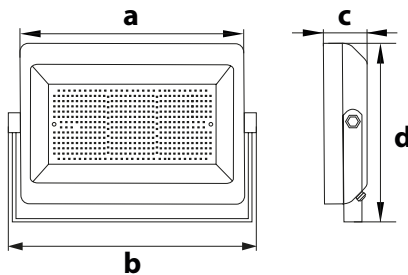

wbudowane diody LED



radiator odprowadzający ciepło



dławnica z przewodem zasilającym



uchwyt montażowy



wytrzymałe szkło hartowane



kod



EAN



opakowanie



barwa światła [K]

P<sub>ON</sub>

moc w trybie włączenia [W]



strumień świetlny [lm]

C65-LFS-010BL-4K	5900280946867	1/50	4000	10	850
C65-LFS-010BL-6K	5900280919892	1/50	6000	10	870
C65-LFS-020BL-4K	5900280946874	1/20	4000	20	1750
C65-LFS-020BL-6K	5900280919908	1/20	6000	20	1800
C65-LFS-030BL-4K	5900280946881	1/20	4000	30	2500
C65-LFS-030BL-6K	5900280919915	1/20	6000	30	2600
C65-LFS-050BL-4K	5900280946898	1/10	4000	50	4200
C65-LFS-050BL-6K	5900280919922	1/10	6000	50	4300
C65-LFS-100BL-4K	5900280946904	1/5	4000	100	8000
C65-LFS-100BL-6K	5900280924254	1/5	6000	100	8500
C65-LFS-150BL-4K	5900280946911	1/5	4000	150	12000
C65-LFS-150BL-6K	5900280924261	1/5	6000	150	12700
C65-LFS-200BL-4K	5900280946928	1/5	4000	200	16000
C65-LFS-200BL-6K	5900280924278	1/5	6000	200	17000