

# SOLA LED D SLIM MVS

PL: Plafoniera z czujnikiem ruchu / CZ: Plafon s pohybovým čidlem / SK: Plafón s pohybovým čidlom



STRÜHM



① SOLA LED D SLIM MVS 20W 4000K

② SOLA LED D SLIM MVS 28W 4000K

**SENSOR**



**MAX 8M**

**AREA**



**LUX**

3-2000




**AREA**



**TIME**

10s-12min

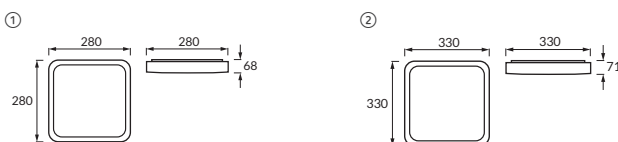

| ① | 01234 | ABCDE                         |      |         |                        |  |               |
|---|-------|-------------------------------|------|---------|------------------------|--|---------------|
| ① | 03757 | SOLA LED D SLIM MVS 20W 4000K | 20 W | 1360 lm | biały<br>bílá<br>biela | neutralna biała<br>neutrální bílá<br>neutrálna biela | 5901477337574 |
| ② | 03758 | SOLA LED D SLIM MVS 28W 4000K | 28 W | 1900 lm |                        |  | 5901477337581 |



**Materiał / Material / Materiál**

PL: blacha stalowa, tworzywo sztuczne  
CZ: kovový výlisek, plast  
SK: kovový výlisek, plast

**Uwagi / Komentář / Komentáre**

PL: zasięg wykrywania ruchu max 8m  
CZ: dosah detekce pohybu max 8m  
SK: rozsah detekcie pohybu max 8m

**Uwagi / Komentář / Komentáre**

PL: regulacja czasu świecenia od 10s do 12min  
CZ: nastavitelná doba svícení od 10s do 12min  
SK: nastavitelná doba svietenia od 10s do 12min

**Uwagi / Komentář / Komentáre**

PL: kąt działania czujnika 180°+360° (V+H)  
CZ: úhel detekce pohybu 180°+360° (V+H)  
SK: uhol detekcie pohybu 180°+360° (V+H)

**Uwagi / Komentář / Komentáre**

PL: możliwość ustawienia poziomu natężenia oświetlenia otoczenia (3-2000lx)  
CZ: možnost nastavení úrovně intenzity okolního světla (3-2000lx)  
SK: možnosť nastavenia úrovne intenzity okolitého svetla (3-2000lx)

