

SOL SOLER, LGH LIGHTER

SOLAR LED LUMINAIRE
SOLARLEUCHE
СОЛНЕЧНЫЙ СВЕТИЛЬНИК
SOLÁRNÍ LED SVÍTIDLO

- LiFePO4
- 4000K LGH
- 3000K 6000K SOL
- CRI Ra ≥ 80
- 360° LGH
- 120° SOL
- IK02
- 50°C
-30°C
- IP65 LGH
- IP66 SOL





LGH-025DG



SOL-S


MATERIAL OBUDOWY ▶ stop aluminium
MATERIAL ▶ aluminum alloy
MATERIAL ▶ aluminiumlegierung
МАТЕРИАЛ ▶ алюминийевый сплав
MATERIAL ▶ hliník

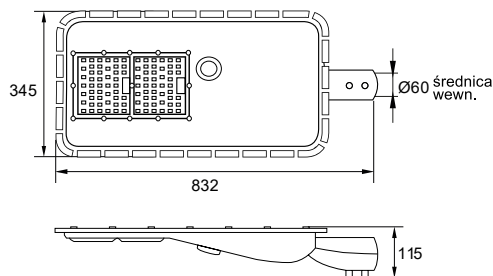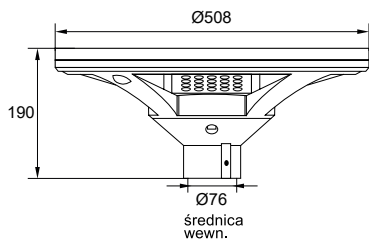

diody LED PHILIPS z soczewkami



panele fotowoltaiczne



LGH - panel solarny z monokrystalicznego krzemu



SOL - czujnik ruchu



LGH - czujnik ruchu



LGH - zasięg działania pilota w terenie otwartym do 10m



kod	EAN	opakowanie	barwa światła [K]	moc w trybie włączenia [W]	strumień świetlny [lm]	typ zasilania
C82-SOL-020BL-4K-MS	5900280954831	1	4000	20	3000	solarne / sieciowe
C82-SOL-040BL-4K-MS	5900280954848	1	4000	40	6000	solarne / sieciowe
C82-SOL-020DG-4K-MS	5900280954855	1	4000	20	3000	solarne / sieciowe
C82-SOL-040DG-4K-MS	5900280954862	1	4000	40	6000	solarne / sieciowe
C80-LGH-025DG-3K-MS	5900280957979	1	3000	25	2000	solarne
C80-LGH-025DG-6K-MS	5900280954879	1	6000	25	2000	solarne

* Oznaczenie koloru w kodzie: BL - czarny; DG - ciemno szary