



LED |  | IP65 | IK09 | 

## TECHNICAL PARAMETERS

Ingress protection:	IP65;
Impact resistance:	IK09;
Nominal power [W]:	36.00; 47.00;
Luminous flux [lm]*:	4400 - 6000
Colour temperature [K]:	4000;
Colour rendering index:	>80;
SDCM:	≤ 5;
Energy efficiency class:	A+;
Material of the body:	PC;
Diffuser type:	transparent; MAT;
Mounting version:	surface, suspended;
Dimensions [mm]:	1152/85/80; 1432/85/80;

\*Tolerance +/- 10%

## CHARACTERISTICS

ATLAS LED is a fitting with very high IP65 tightness and IK09 mechanical resistance. The solution based on integration of the diffuser and LED panel is applied in the fitting. The fitting has a lot of facilities making the mounting easier and faster: the system of diffuser suspension, adjustable mounting brackets ensuring the mounting tolerance +/-40mm. Standard equipment of the fitting: clips made of stainless steel (INOX).

## APPLICATION

A multipurpose LED fitting intended for using in the areas where high dust and moisture resistance is required. Highly recommended to be used in industrial buildings, warehouses, car parks (underground and multilevel), sports stadiums, transport terminals and underground passageways. Its construction is intended both for surface and suspended mounting. Adjustable mounting brackets (the mounting tolerance +/-40mm). Suspended diffuser integrated with LED GO! panel.

# ATLAS LED

LED GO!

## AVAILABLE TYPES

[Click >> index, to see details](#)

### ATLAS LED 36W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions [mm]	Energy efficiency class	Index
36	4000	4400	MAT	1152/85/80	A+	<a href="#">&gt;&gt; 952043</a>
36	4000	4500	transparent	1152/85/80	A+	<a href="#">&gt;&gt; 952005</a>

### ATLAS LED 47W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Dimensions [mm]	Energy efficiency class	Index
47	4000	5900	MAT	1432/85/80	A+	<a href="#">&gt;&gt; 952050</a>
47	4000	6000	transparent	1432/85/80	A+	<a href="#">&gt;&gt; 952012</a>

\*Tolerance +/- 10%

## ACCESSORIES

Name	Index
TYTAN LED, ATLAS LED, INDUSTRY LED - uchwyt regulowany (kpl. 2 szt.)	908200
	907913
	907920
ATLAS LED 1150mm 4500lm 840 - moduł świetlny	952029
ATLAS LED 1450mm 6000lm 840 - moduł świetlny	952036
	952074
	952067



TYTAN LED, ATLAS LED, INDUSTRY LED - uchwyt regulowany (kpl. 2 szt.) (908200)



(907913)



(907920)



ATLAS LED 1150mm 4500lm 840 - moduł świetlny (952029)



ATLAS LED 1450mm 6000lm 840 - moduł świetlny (952036)



(952074)




(952067)

# ATLAS LED

LED GO!

## LUMINOUS INTENSITY DISTRIB. CURVE

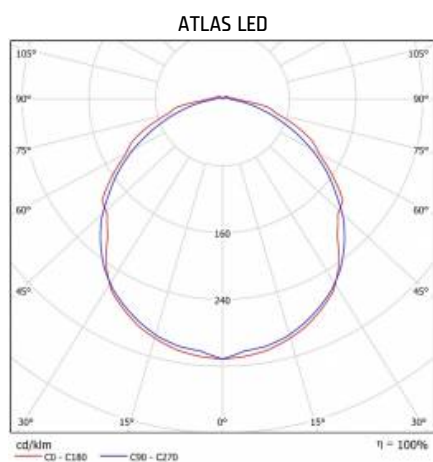

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2019-04-01



Lena Lighting S.A.  
ul. Kórnicka 52  
63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
e-mail: office@lenalighting.pl  
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).

