

# OVAL LED

LED GO!



24 V | 220-240 V | LED | □ | ◇ | IP40 | IP44 | IK06 | CE

## TECHNICAL PARAMETERS

Ingress protection:	IP44/IP40;
Impact resistance:	IK06;
Nominal power [W]:	2.50;
Luminous flux [lm]*:	210 - 340
Colour temperature [K]:	3000; 4000;
Energy efficiency class:	A;
Material of the body:	PP;
Diffuser material:	glass;
Diffuser type:	PRM;
Mounting version:	surface;
Dimensions [mm]:	125/170/105;

\*Tolerance +/- 10%

## CHARACTERISTICS

Surface mounted, oval channel-type LED fitting with ingress protection class IP44 and an integrated energy-saving light source LED GO!. Polypropylene base; prismatic glass diffuser. Fitting is available in two power versions and six base colors. Also available are numerous special-purpose versions: a 24V fitting or fittings that can be used as marker lights (Oval LED RED equipped with red-colored diodes and Oval LED BLUE equipped with blue-colored diodes).

## APPLICATION

Surface mounted luminaire for mounting on ceilings and walls; intended for indoor use (rooms with high humidity, passageways and staircases, sewers and basements) as well as outdoor use (industrial façade lighting, parking lots). The 24V version is particularly well-suited to be used as a light source for public rooms and buildings (civic buildings, apartment buildings).

# OVAL LED

LED GO!

## AVAILABLE TYPES

[Click >> index, to see details](#)

### OVAL LED 220 - 240V


Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Energy efficiency class	Index
2.50	3000	210	PRM	white	A	<a href="#">&gt;&gt; 233081</a>
2.50	4000	210	PRM	white	A	<a href="#">&gt;&gt; 233012</a>
2.50	3000	210	PRM	gray	A	<a href="#">&gt;&gt; 233135</a>
2.50	4000	210	PRM	gray	A	<a href="#">&gt;&gt; 233067</a>

### OVAL LED 24V

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Colour of the body	Energy efficiency class	Index
2.50	4000	210	PRM	white	A	<a href="#">&gt;&gt; 233302</a>
2.50	4000	250	PRM	gray	A	<a href="#">&gt;&gt; 233340</a>

\*Tolerance +/- 10%

## LUMINOUS INTENSITY DISTRIB. CURVE

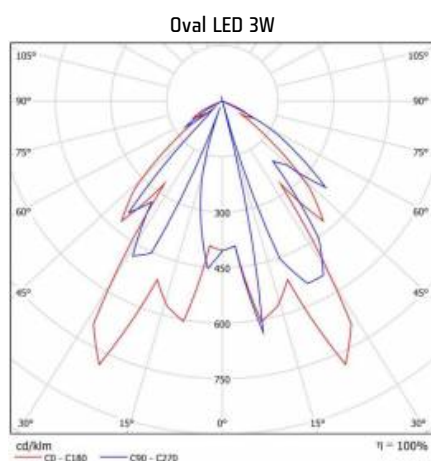

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2019-10-15



Lena Lighting S.A.  
ul. Kórnicka 52  
63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
e-mail: office@lenalighting.pl  
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



175/2018