

VECTOR 3 LED BASIC



220-240 V | LED | IP40 | IK07
50-60 Hz

TECHNICAL PARAMETERS

Ingress protection:	IP40;
Impact resistance:	IK07;
Nominal power [W]:	31.00 - 77.00
Luminous flux [lm]*:	3100 - 8900
Colour temperature [K]:	4000;
Colour rendering index:	>80;
SDCM:	≤ 3;
Energy efficiency class:	A; A+;
Material of the body:	Raw steel sheet, powder coated;
Diffuser material:	PC;
Diffuser type:	PRM MAT; PRM;
Mounting version:	surface;
Dimensions [mm]:	601/126/60; 1161/126/60; 1441/126/60;

*Tolerance +/- 10%

CHARACTERISTICS

Surface mounted luminaire made of powder coated white steel with prismatic or prismatic mat PC diffuser providing soft & uniform light. Equipped with LED GO! modules with high luminous efficacy and SDCM <3. The luminaire in standard version has a 5 pole terminal block, that enables quick through-wiring, and strain relief.

Available versions:

- motion sensor (RCR).

APPLICATION

Multi-purpose LED luminaire designed for indoor application. Especially recommended for public rooms and corridors (administration buildings, schools, universities and health care buildings).

VECTOR 3 LED BASIC

AVAILABLE TYPES

[Click >> index, to see details](#)

VECTOR 3 LED BASIC 1161/126/60mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Energy efficiency class	Index
41	4000	5000	PRM		A+	>> 661044
41	4000	5000	PRM	yes	A+	>> 661105
41	4000	4300	PRM MAT		A+	>> 661013
41	4000	4300	PRM MAT	yes	A+	>> 661075

VECTOR 3 LED BASIC 1441/126/60mm

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Energy efficiency class	Index
77	4000	8900	PRM		A+	>> 661051
77	4000	8900	PRM	yes	A+	>> 661112
77	4000	7700	PRM MAT		A	>> 661020
77	4000	7700	PRM MAT	yes	A	>> 661082

VECTOR 3 LED BASIC 601/126/60mm



Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Motion sensor	Energy efficiency class	Index
31	4000	3600	PRM		A+	>> 661037
31	4000	3600	PRM	yes	A+	>> 661099
31	4000	3100	PRM MAT		A	>> 661006
31	4000	3100	PRM MAT	yes	A	>> 661068

*Tolerance +/- 10%

ACCESSORIES

Name	Index
Hang single Y-type support 1.5m silver	81000110

LUMINOUS INTENSITY DISTRIB. CURVE

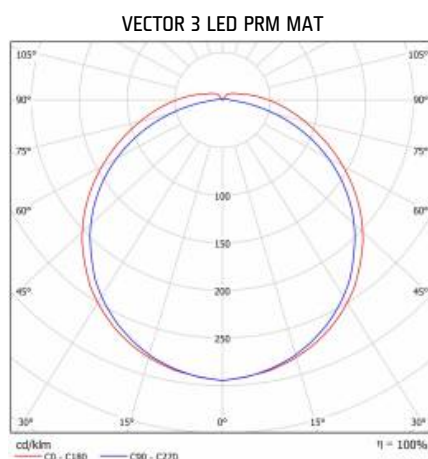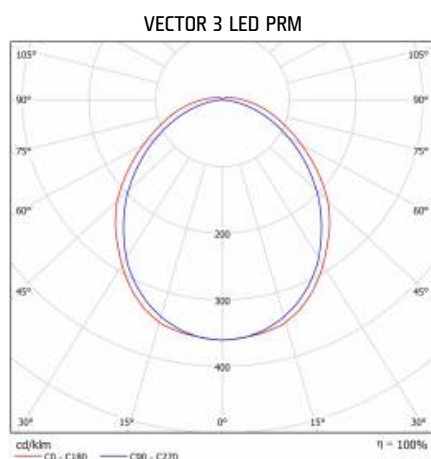

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2019-10-28



Lena Lighting S.A.
ul. Kórnicka 52
63-000 Środa Wielkopolska

tel. +48 61 28 60 300
e-mail: office@lenalighting.pl
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



18/2019